

10653

ADJUSTABLE VERTICAL CLAMPS

Technical Notes

Comprises of two monobloc clamps (short 10650.W0020 and long 10650.W0030), two spacer elements (2 x 10651.W0050), one clamping key (10651.W0160 or 10651.

W0325), one extra long arm (available with clamp in 10650.W0035), 4xM10 screws (10654.W0080 and 10654.W0085) and 6xM10 T-nuts (with spring) for 14, 16 and 18mm slots.

Tips

Clamp heights shown with the use of the riser blocks.

Order No.	Description	Clamp reach	Clamping force kN max.	Clamping height min. max.
10653.W0100	Long Arm Set	61	12	-8 to 176
10653.W0110	Short Arm Set	33	16	0 to 154



A Wide Range of Clamps to Match any Requirement

CLAMPING FORCE
**UPTO
50000
NEWTONS**

10650 All machining operations



**16000
NEWTONS**

10655 Light machining




**6500
NEWTONS**

10658 Electrical discharge machining



**6500
NEWTONS**

10660 Clamping and lifting

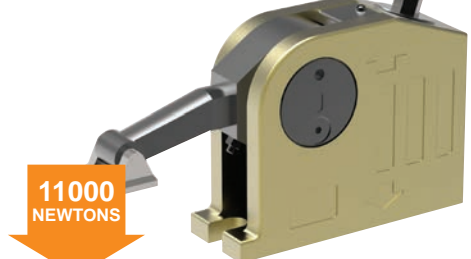


**11000
NEWTONS**

10661 Heavy machining



**40000
NEWTONS**

10670 Repetitive machining

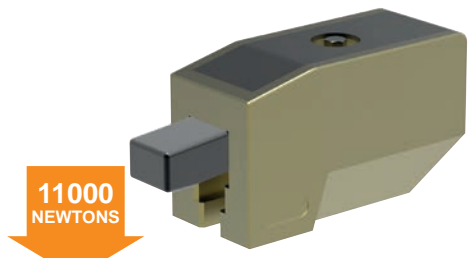


**11000
NEWTONS**

10675 Heavy machining



**35000
NEWTONS**

10678 Press Tool Clamping

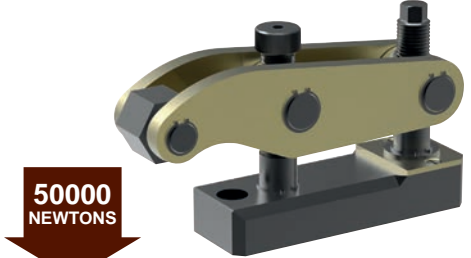

**50000
NEWTONS**




Monobloc Clamps

stackable vertical clamping




Clamping & Height Setting

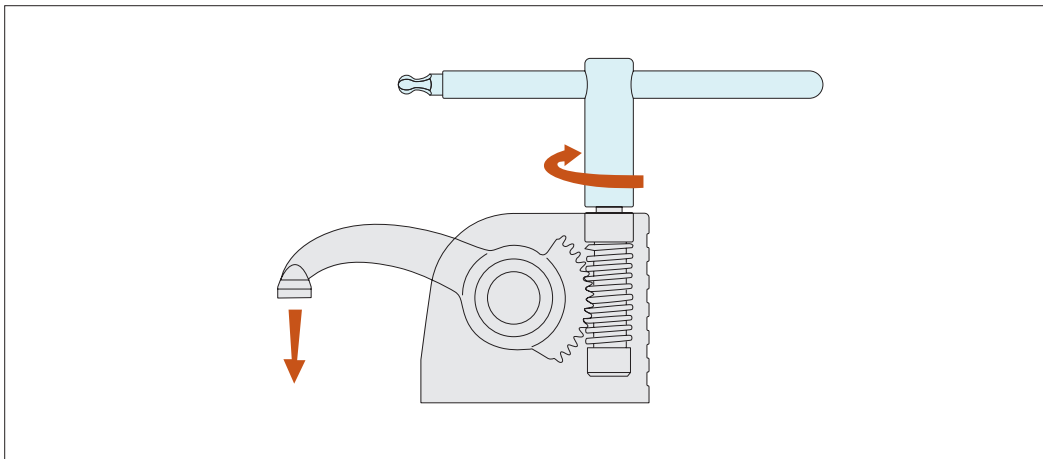


Slide the T-nut into the T-slot position and tighten the clamp onto the T-slot base, with the aid of the clamp key (shown in the image in blue).

Clamp the workpiece by twisting the key. Start machining.

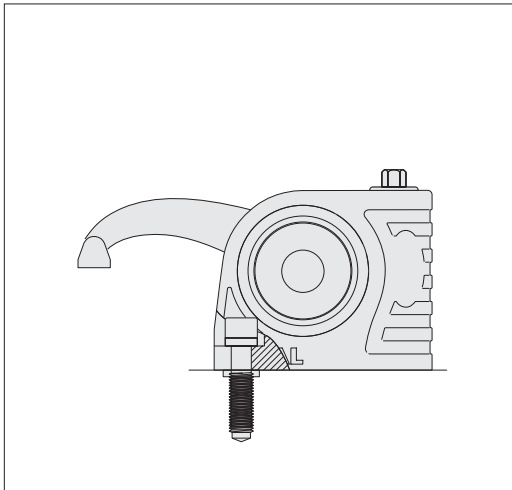


Fix to threaded bases with a special screw M10, M12, M14, M16.

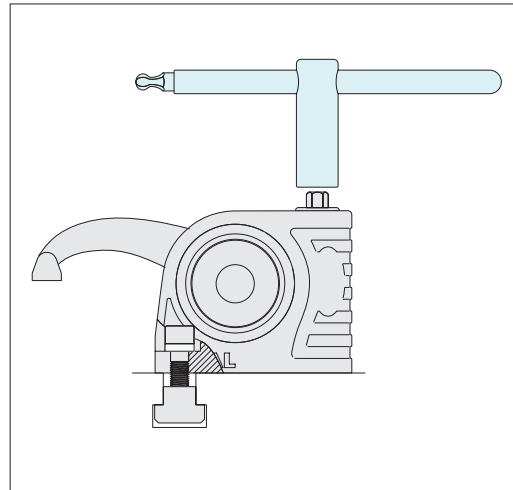

Fix to T-slots with suitable T-nuts.

When unclamped the arm and the clamp remain in position

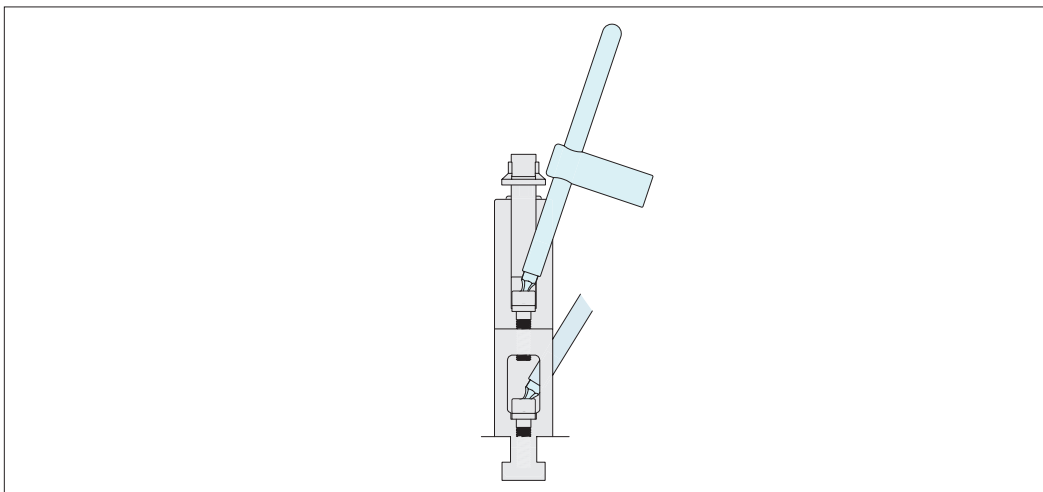

The clamps are easily stackable to achieve required clamping height.

ADJUSTABLE VERTICAL CLAMPS