




Clamping Pins for pull clamps

Low Profile Side Clamping

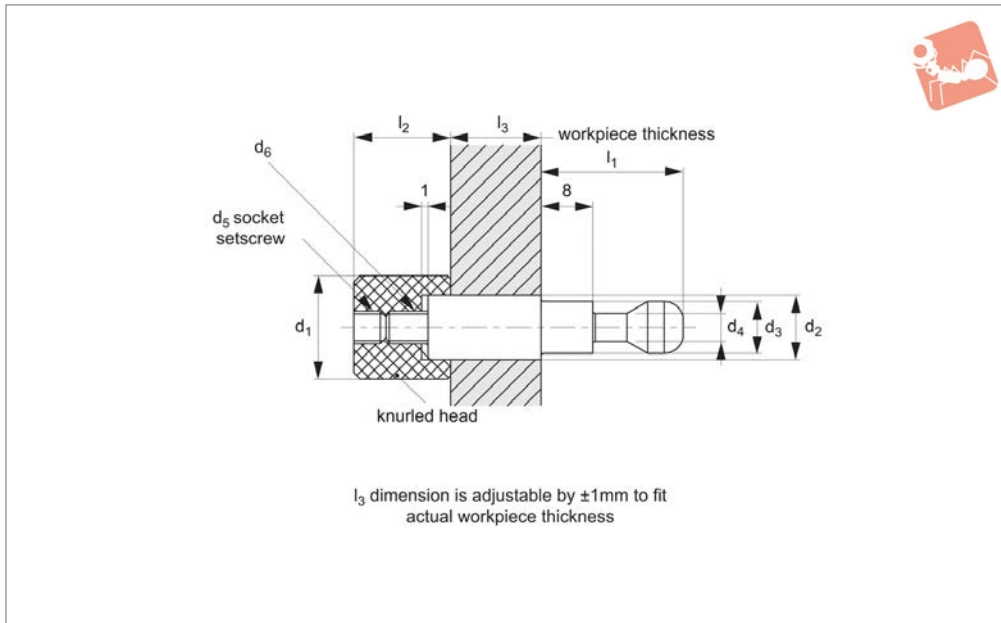

12620.3

LOW PROFILE SIDE CLAMPING

Material

Shank: steel (35CrMo), induction hardened (taper seat), precision ground.
Head: steel (C45), tempered and black oxide finish.

Technical Notes

The length l_3 should be decided depending on the workpiece thickness, adjustable by ± 1 mm.

Tips

In the order table replace XX with l_3 length required to suit workpiece (in mm).

Order No.	d_1	d_2 tol. f7	d_3 tol. f7	d_4	d_5	d_6	l_1	l_2	l_3	Weight g
12620.W0551-XX	10	5	5	3	M 3x4	M 3x0,5	17	10	$3 < l_3 < 50$	8~16
12620.W0552-XX	10	6	5	3	M 3x4	M 3x0,5	17	10	$3 < l_3 < 50$	8~19
12620.W0581-XX	16	8	8	4.3	M 5x5	M 5x0,8	22	15	$4 < l_3 < 80$	30~60
12620.W0582-XX	16	10	8	4.3	M 5x5	M 5x0,8	22	15	$4 < l_3 < 80$	31~77

