




Index Plungers - Pull Grip & Pull Ring

flange mounting - non-locking

Index Plunger & Pins

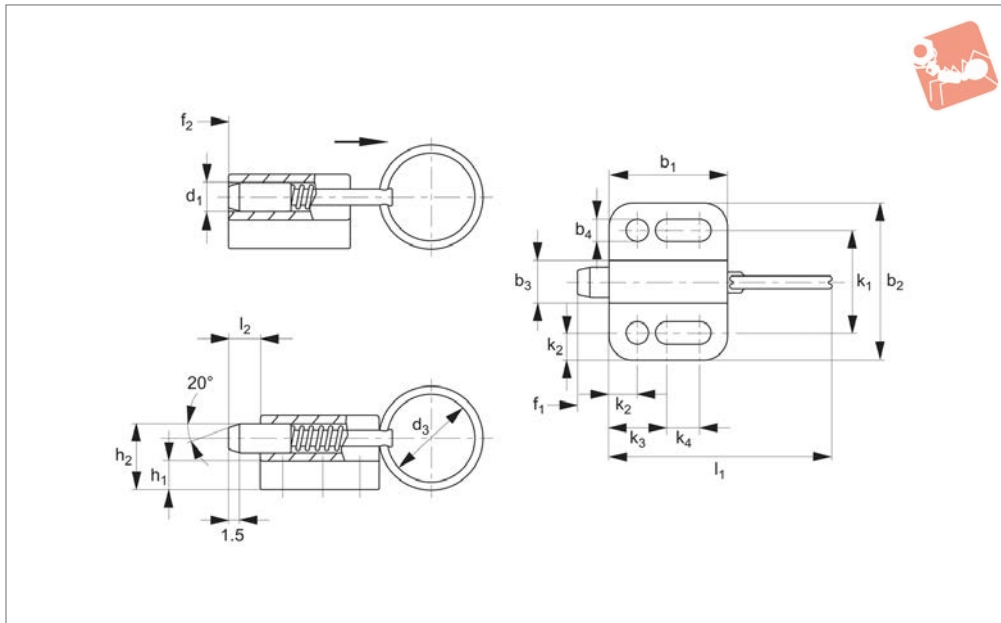

32540

INDEX PLUNGER & PINS

Material

Body: die cast zinc, black.

Pin: stainless steel 1.4305 (AISI 303).

Pull ring: stainless steel 1.4305 (AISI 303).

Integral mounting flange simplifies installation on flat surfaces.

Temperature resistant to 100°C.

Technical Notes

„Non Locking“ type- pin simply springs back when pull ring released.

Tips

Spring loads * = statistical average.

Order No.	Type	d ₁ tol. h9	d ₃	b ₁	b ₂	b ₃	b ₄ -0.2	h ₁	h ₂	k ₁ ±0.05	k ₂	k ₃	k ₄	l ₁	l ₂ min.	Spring load		Weight g
																F ₁ N ≈	F ₂ N ≈	
32540.W0304	Non Locking	4	14	16,5	22	6	3,3	4,0	7,0	14	4,0	8	4,5	34,5	4	3	12	10
32540.W0305	Non Locking	5	18	22,0	28	8	4,3	4,5	9,5	18	5,0	10	7,0	45,0	5	5	24	20
32540.W0306	Non Locking	6	24	27,5	32	10	5,4	5,0	10,5	21	5,5	12	10,0	57,5	6	5	21	40
32540.W0308	Non Locking	8	30	33,0	34	12	5,4	6,0	12,5	23	5,5	12	15,5	71,0	8	6	22	58
32540.W0310	Non Locking	10	30	35,0	39	14,5	6,5	6,0	14,5	27	6,0	15	13,5	75,0	10	4	25	83



A Wide Selection of Solutions

Applications

- Locating and positioning.
- Indexing.
- Securing.
- Positive locking.
- Rapid adjustment of all kinds of tables, platforms and fixtures.
- Machine and fixture design.
- OEM products.
- Sports equipment.
- Medical aides (wheelchairs etc.).
- Aerospace.
- Machine cabinets.

Materials



Steel with plastic grip



Stainless with plastic grip



Stainless body and grip

Locking or Non Locking



Locking (park)



Non locking (spring back)



Push pull

Handling and Actuation Methods



Standard grip



Lever grip



T-handle



Pull ring



Threaded for bespoke handle

Mounting Options



Fine threaded (standard)



Coarse thread



Flange mount



Thin wall mount



Weldable

Additional Technical Notes

- Unless otherwise stated, grips on index plungers are not removable.
- Many of the pins on index plungers are toleranced to either the pin or the hole. Please refer to the specific product table.
- Index plungers are not recommended for shear load applications.

	Pin Tol.	Hole Tol.
①	h_9	+0,03 +0,08
②	-0,02 -0,04	H_7

Spring Loads

- s** Stroke, or movement of plunger's pin.
- f₁** The force required in Newtons (N) to overcome the static strength of the spring and achieve initial movement of the plunger's pin.
- f₂** The force required in Newtons (N) to fully compress the spring until the pin is fully depressed against the plunger's body.

