




Grippers - Self Aligning - Housing

female threaded housing only

Grippers & Rest Pads

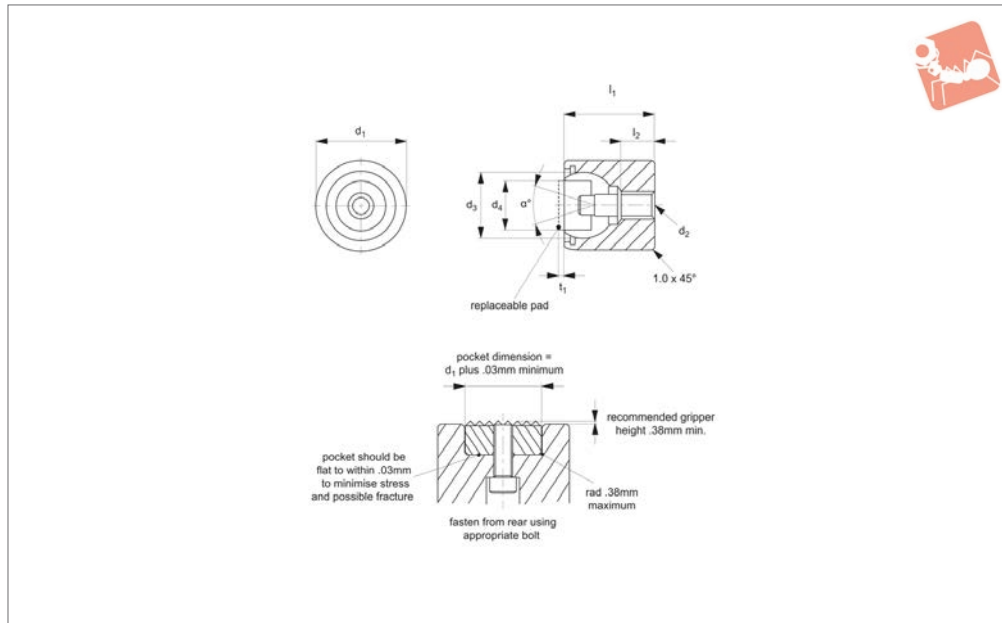

35580

GRIPPERS & REST PADS

Material

Body: steel, heat treated to HRC 43/46, back oxide finish.

Ball: stainless steel (440C), hardened to HRC58/60.

Technical Notes

These adjustable self-aligning ball units

accept inserts:

- no. 35330 carbide tipped grippers.
- no. 35450 hardened tool steel grippers.
- no. 35980 steel/thermoplastic rest pads.

These must be ordered separately.


These parts can serve as stops, supports and thrust elements in jigs and fixtures.

They can also be fitted to existing workholding elements.

Order No.	Ball dia. d_3	d_1 +0.00 -0.13	d_2	Replaceable pad dia. d_4	l_1 ± 0.05	l_2 ± 0.25	t_1	α °	Load kg max.
35580.W0001	13	17	M 6x1,0	10	18	7.5	4	20	2799
35580.W0004	15	19	M 8x1,25	12	20	8.5	4	20	3941
35580.W0007	20	24	M10x1,5	16	24	9.0	4	20	5952
35580.W0010	23	30	M12x1,75	20	26	8.5	4	20	9683
35580.W0013	28	36	M12x1,75	25	32	12.0	4	20	13861




Grippers enhance workholding for multiple machining operations.

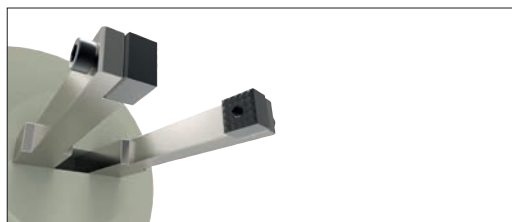

Grippers increase handling capability.

Pads and Gripper Options

Pads



Solid Carbide

High impact carbide pads, can be brazed or bonded into place.



Carbide Tipped

Constructed with high impact carbide pad brazed to a heat treated alloy steel body. Mount via tapped hole or a flat on the outside diameter for set screw mounting.



Hardened Steel

Made from 8620 steel, carburized and hardened to Rc 58/60 1.2mm with black oxide finish. Mount via tapped or counter bored hole.




Non-marking Thermoplast

Made from white thermoplast. Mount via tapped or counter bored hole.



Stainless Steel

Pad from 17-4 stainless steel, hardened to Rc 43/46. Mount via tapped or counter bored hole.

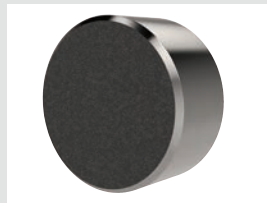

Abrasive Diamond Surface

Abrasive surface permanently fused to a 17-4 stainless steel pad, hardened to Rc 43/46. The surface texture is comparable to a 100 grit abrasive. Mount via tapped or counter bored hole.



Soft Urethane Surface

Urethane surface is permanently bonded to a 300 series stainless steel pad. The urethane provides excellent protection against damage on delicate work surfaces. Tapped hole mounting.


see our website for our full range: wixroyd.com

Grippers




High Speed Tool Steel

Manufactured from M-2 high speed tool steel, hardened to Rc 60/62 with black oxide finish. Mount via tapped hole, counter bored hole or a flat on the outside diameter for set screw mounting.



Carbide Tipped

Constructed with high impact carbide pad brazed to a heat treated alloy steel body. Mounts via tapped hole or a flat on the outside diameter for set screw mounting.



Solid Carbide

Manufactured from high impact carbide in a solid gripper pad or as a solid gripper body with a threaded brazed-in steel insert. Mount via tapped hole or a flat on the outside diameter for set screw mounting.



A Range of Specialist Gripping Pads to Suit Your Application



Unique urethane coat prevents marking of delicate components during machining or manipulation by robots. The urethane pad is permanently bonded to the stainless steel body of the gripping pad. With a bubbled texture, air is able to escape and hence avoid any suction action - enabling easy releasing of parts.

Urethane Coated

These are available in three different urethane durometers.




35 durometer:
Pencil rubber top



60 durometer:
Car tyre



80 durometer:
Skateboard wheel

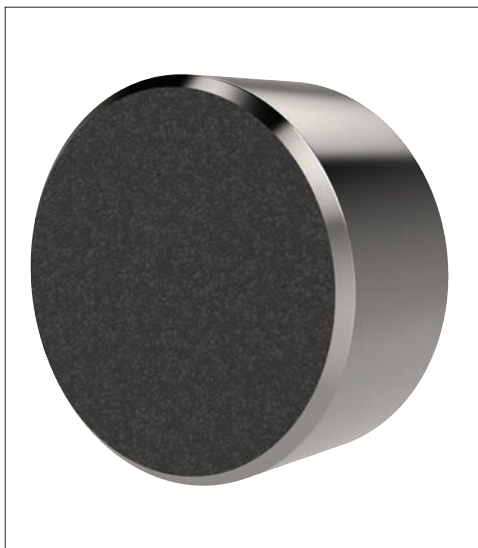


To improve handling of smooth or slippery components, with a minimum of clamping pressure, our abrasive diamond coated pads provide an excellent solution.

Abrasive Diamond Coated

Diamond powders are permanently fused to a 17-4 stainless pad, to provide an abrasive surface comparable to 100 grit value.



Sandpaper of 100
grit texture

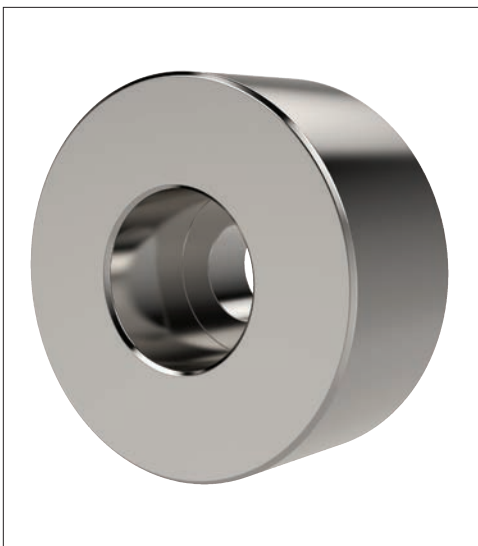

Pads of 17-4 Stainless, hardened to RC 43/46 provide solutions to applications where material selection is of greater importance; for example nuclear or food processing or pharmaceutical applications.

Stainless Pads