




Screwed Rest Buttons - Plastic male thread

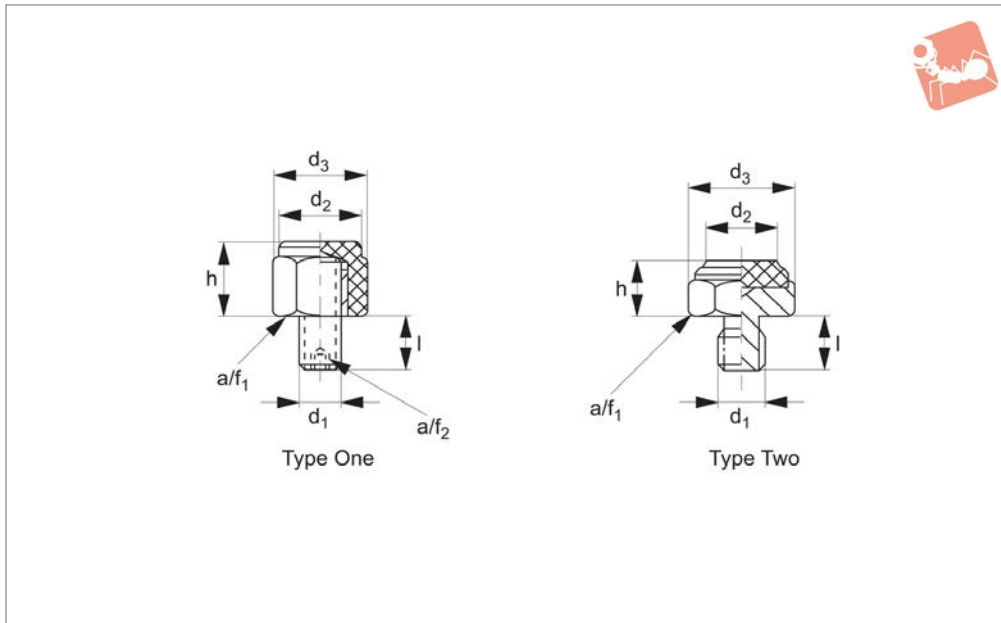

36403

LOCATING PINS

Material

Body: stainless steel 1.4305
Pad: plastic (PEEK), blue

supports and thrust pads in jigs and fixtures as well as machine and equipment design.
Temperature range -60 to +250°C.

Tips

For female thread see 36404.

Technical Notes

The buttons are used as seats, stops,

Order No.	d ₁	d ₂	d ₃	h ±0.1	l	A/F ₁	A/F ₂	Static load kN max.	Tightening torque Nm max.	Weight g
36403.W0122	M 8	17.0	19.0	15	8	17	4	2.1	10	12
36403.W0133	M10	19.0	21.5	20	10	19	5	2.4	10	18
36403.W0143	M12	22.0	25.0	20	14	22	6	3.4	10	24
36403.W0021	M 8	12.5	19.4	10	10	17	-	2.8	18	15
36403.W0031	M10	14.5	21.9	10	12	19	-	3.8	2	21
36403.W0032	M10	14.5	21.9	15	12	19	-	3.8	32	33
36403.W0041	M12	17.5	25.2	10	14	22	-	5.5	60	30
36403.W0042	M12	17.5	25.2	15	14	22	-	5.5	60	46