

**63350**

LOAD RINGS & EYE BOLT

### Material

High tensile corrosion resistant steel, strength class >8.  
Coloured yellow to indicate personnel safety.  
Supplied with CE certificate.

### Technical Notes

Conforms to EN795:2012.  
Single articulation, 360°.  
Clearly marked with maximum number of persons. The yellow colour indicates the personnel safety use.

### Tips

Marked with the number of persons the ring is certified to support.  
For use by personnel wearing safety harnesses. Suitable for 1 or 2 persons as marked.  
Typically used in building maintenance, wind power and offshore industries.

### Important Notes

The thread diameter and depth must be appropriate to the material into which it will be installed:

Steel (min. ST37) - 1 x thread dia.  
Cast iron - 1.25 x thread dia.  
Aluminium - 2 x thread dia.  
Other light metals - 2.5 x thread dia.  
Tolerance of female thread to be 6H (metric).

**Please refer to the safety documentation before using this part.**

**Supplied with certificate and operating instructions.**

Order No.	No. of persons max.	$l_1$	$w_1$	$h_1$	$d_1$ tol. 6g	$h_2$	$w_2$	$w_3$	A/F	Torque to Nm	Weight kg
63350.W0012	1	21	60	57	M12x1,75	30	20	34	6	15	0.24
63350.W0016	1	27	88	80	M16x2,00	38	35	45	8	50	0.80
63350.W0020	1	30	88	80	M20x2,50	38	35	45	8	100	0.80




## Swivel lifting rings

Our swivel lifting rings fully comply with the EC directive 2006/42/EC. They are CE marked and are supplied with a Certificate of Conformity. There is a 100% check on anti-cracking, a proof load test of 2.5 x load limit and a safety factor of 5 on most parts. Each ring is individually marked to ensure full product traceability.

The Swivel Lifting Rings come in three main forms – depending on the number of axis required to swivel. The most popular type is the double swivel rings.



**Single swivel** - threads M8 – M48  
loads 0,3 tons – 15 tons

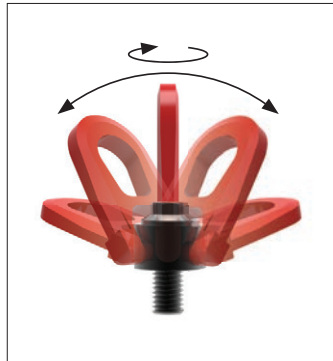

**Double swivel** - threads M4 – M100  
loads 0,05 tons – 50 tons



**Triple swivel** - threads M8 – M56  
loads 0,3 tons – 22 tons

## Steel and stainless steel (316) versions




Steel



Stainless (316L)

## Product marking

Compliant with 2006/42/EC, and with individual date of manufacture and batch number.

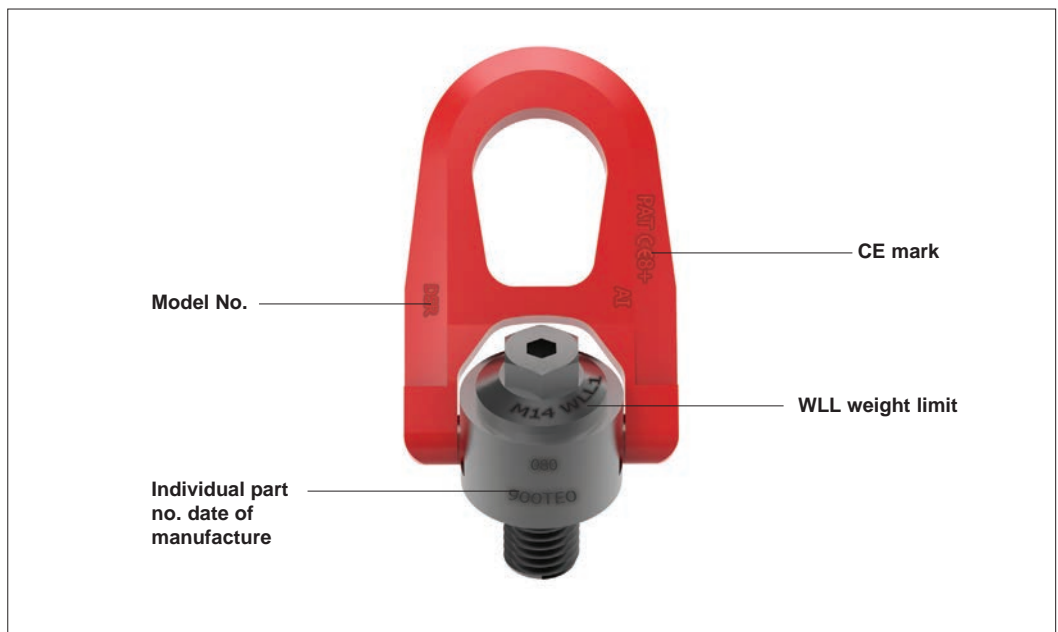

A swivel lifting rings that complies with 2006/42/CE