

62000

PRECISION LEVELLING ADJUSTERS

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).



Technical Notes



After setting the height, the structure can be bolted down using a suitable 8,8

strength bolt.

The net load that the unit can carry is the maximum load less the tightening torque recommended for the bolt. Designed for applications with limited space. Height adjustment is between 4 and 10mm.

Order No.	Material	For bolt	h_1	h_2	h_3	d_1	d_2	d_3	Load with bolt kN max.	Load w/o bolt kN max.
62000.W0038	Steel	M 4	19	15	4	25	4.5	M15x1,0	36.00	40.0
62000.W0039	Steel	M 5	19	15	4	25	5.5	M15x1,0	33.40	40.0
62000.W0040	Steel	M 6	19	15	4	25	6.6	M15x1,0	30.70	40.0
62000.W0050	Steel	M 6	23	18	5	32	6.6	M20x1,0	55.70	65.0
62000.W0051	Steel	M 8	23	18	5	32	9.0	M20x1,0	48.00	65.0
62000.W0052	Steel	M10	23	18	5	32	11.0	M20x1,0	37.90	65.0
62000.W0070	Steel	M10	29	22	7	45	11.0	M30x1,5	92.90	120.0
62000.W0071	Steel	M12	29	22	7	45	13.5	M30x1,5	80.40	120.0
62000.W0072	Steel	M16	29	22	7	45	17.5	M30x1,5	45.50	120.0
62000.W0090	Steel	M16	37	28	9	58	17.5	M40x1,5	136.00	210.0
62000.W0091	Steel	M20	37	28	9	58	22.0	M40x1,5	90.00	210.0
62000.W0092	Steel	M24	37	28	9	58	26.0	M40x1,5	37.00	210.0
62000.W0100	Steel	M20	43	33	10	70	22.0	M50x1,5	210.00	330.0
62000.W0101	Steel	M24	43	33	10	70	26.0	M50x1,5	157.00	330.0
62000.W0102	Steel	M30	43	33	10	70	33.0	M50x1,5	53.00	330.0
62000.W0502	Stainless steel	M 4	19	15	4	25	4.5	M15x1,0	24.14	27.1
62000.W0503	Stainless steel	M 5	19	15	4	25	5.5	M15x1,0	22.24	27.1
62000.W0504	Stainless steel	M 6	19	15	4	25	6.6	M15x1,0	20.26	27.1
62000.W0550	Stainless steel	M 6	23	18	5	32	6.6	M20x1,0	36.56	43.4
62000.W0551	Stainless steel	M 8	23	18	5	32	9.0	M20x1,0	30.86	43.4
62000.W0552	Stainless steel	M10	23	18	5	32	11.0	M20x1,0	23.41	43.4
62000.W0570	Stainless steel	M10	29	22	7	45	11.0	M30x1,5	64.01	84.0
62000.W0571	Stainless steel	M12	29	22	7	45	13.5	M30x1,5	54.82	84.0
62000.W0572	Stainless steel	M16	29	22	7	45	17.5	M30x1,5	28.90	84.0
62000.W0590	Stainless steel	M16	37	28	9	58	17.5	M40x1,5	92.90	148.0
62000.W0591	Stainless steel	M20	37	28	9	58	22.0	M40x1,5	59.08	148.0
62000.W0592	Stainless steel	M24	37	28	9	58	26.0	M40x1,5	20.30	148.0
62000.W0600	Stainless steel	M20	43	33	10	70	22.0	M50x1,5	136.08	225.0
62000.W0601	Stainless steel	M24	43	33	10	70	26.0	M50x1,5	97.30	225.0
62000.W0602	Stainless steel	M30	43	33	10	70	33.0	M50x1,5	20.60	225.0

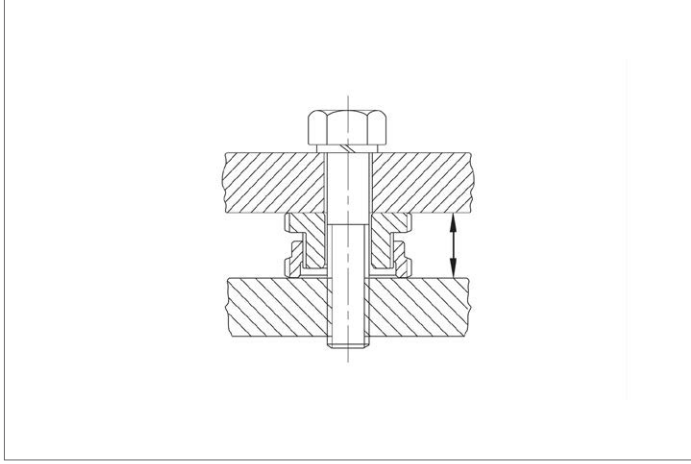

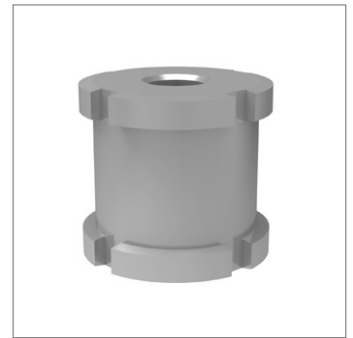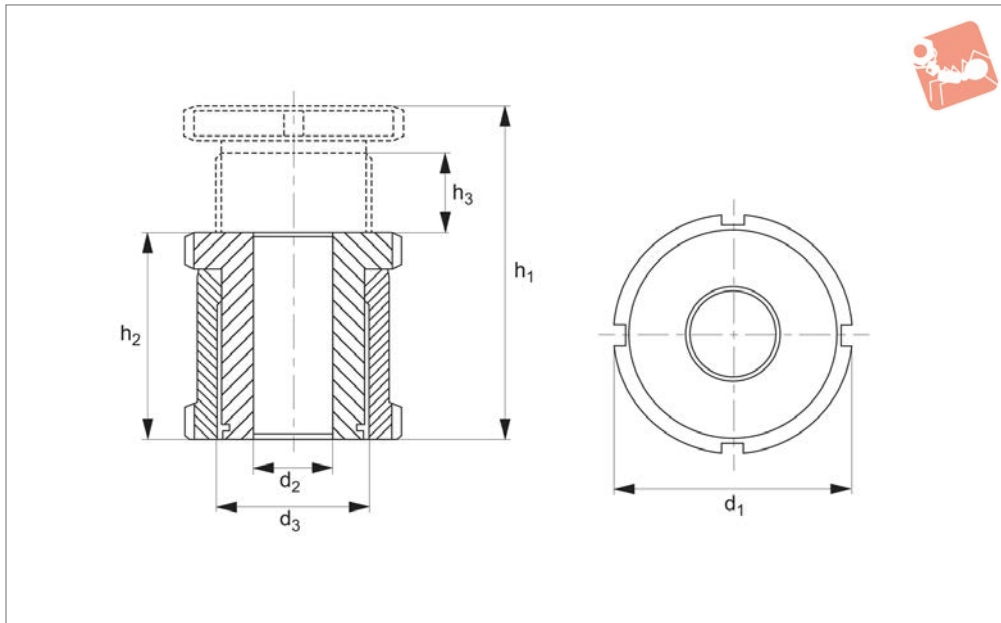

62060

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

After setting the height, the structure can be bolted down using a suitable 8,8

strength bolt.

The net load that the unit can carry is the maximum load less the tightening torque recommended for the bolt. Designed for applications where a wide adjustment range is required - height adjustment is

equal to 15 to 40mm.

Order No.	Material	For bolt	h_1	h_2	h_3	d_1	d_2	d_3	Load with bolt kN max.	Load w/o bolt kN max.
62060.W0013	Steel	M 4	43	28	15	25	4.5	M15x1,0	36.00	40.00
62060.W0014	Steel	M 5	43	28	15	25	5.5	M15x1,0	33.40	40.00
62060.W0015	Steel	M 6	43	28	15	25	6.6	M15x1,0	30.70	40.00
62060.W0021	Steel	M 6	55	35	20	32	6.6	M20x1,0	55.70	65.00
62060.W0022	Steel	M 8	55	35	20	32	9.0	M20x1,0	48.00	65.00
62060.W0023	Steel	M10	55	35	20	32	11.0	M20x1,0	37.90	65.00
62060.W0025	Steel	M10	67	42	25	45	11.0	M30x1,5	92.90	120.00
62060.W0026	Steel	M12	67	42	25	45	13.5	M30x1,5	80.40	120.00
62060.W0027	Steel	M16	67	42	25	45	17.5	M30x1,5	45.50	120.00
62060.W0030	Steel	M16	86	54	32	58	17.5	M40x1,5	136.00	210.00
62060.W0031	Steel	M20	86	54	32	58	22.0	M40x1,5	90.00	210.00
62060.W0032	Steel	M24	86	54	32	58	26.0	M40x1,5	37.00	210.00
62060.W0040	Steel	M20	106	66	40	70	22.0	M50x1,5	210.00	330.00
62060.W0041	Steel	M24	106	66	40	70	26.0	M50x1,5	157.00	330.00
62060.W0042	Steel	M30	106	66	40	70	33.0	M50x1,5	53.00	330.00
62060.W0513	Stainless steel	M 4	43	28	15	25	4.5	M15x1,0	24.14	27.10
62060.W0514	Stainless steel	M 5	43	28	15	25	5.5	M15x1,0	22.24	27.10
62060.W0515	Stainless steel	M 6	43	28	15	25	6.6	M15x1,0	20.26	27.10
62060.W0521	Stainless steel	M 6	55	35	20	32	6.6	M20x1,0	36.56	43.40
62060.W0522	Stainless steel	M 8	55	35	20	32	9.0	M20x1,0	30.86	43.40
62060.W0523	Stainless steel	M10	55	35	20	32	11.0	M20x1,0	23.41	43.40
62060.W0525	Stainless steel	M10	67	42	25	45	11.0	M30x1,5	64.01	84.00
62060.W0526	Stainless steel	M12	67	42	25	45	13.5	M30x1,5	54.82	84.00
62060.W0527	Stainless steel	M16	67	42	25	45	17.5	M30x1,5	28.90	84.00
62060.W0530	Stainless steel	M16	86	54	32	58	17.5	M40x1,5	92.90	148.00
62060.W0531	Stainless steel	M20	86	54	32	58	22.0	M40x1,5	59.08	148.00
62060.W0532	Stainless steel	M24	86	54	32	58	26.0	M40x1,5	20.30	148.00
62060.W0540	Stainless steel	M20	106	66	40	70	22.0	M50x1,5	136.08	225.00
62060.W0541	Stainless steel	M24	106	66	40	70	26.0	M50x1,5	97.30	225.00
62060.W0542	Stainless steel	M30	106	66	40	70	33.0	M50x1,5	20.60	225.00







Advantages

- Precision adjusting and re-adjusting.
- Operational under heavy loads.
- Fast installation.
- Greater vertical alignment (from 4 to 105mm).
- Compensation for non-parallel bearing surfaces.
- Suitable for static and dynamic loads.
- Can be anchored to foundation.


Applications

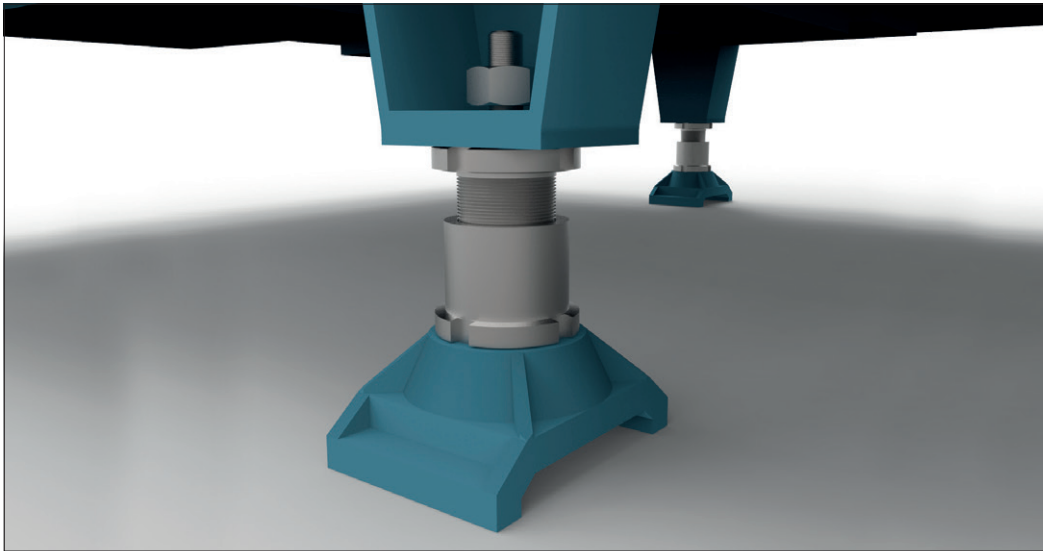


Grounded field mount - Precision Leveller no. 62060 in use on a fully metal encapsulated gas-insulated high voltage switch.

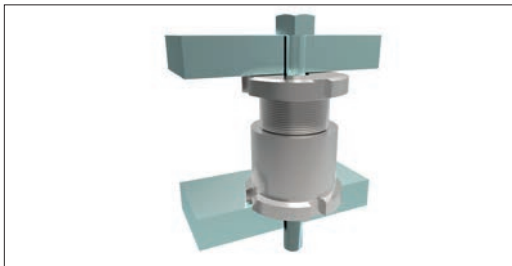


Test stand - Precision Levellers provide adjustment for the connection shaft between motor and transmission.

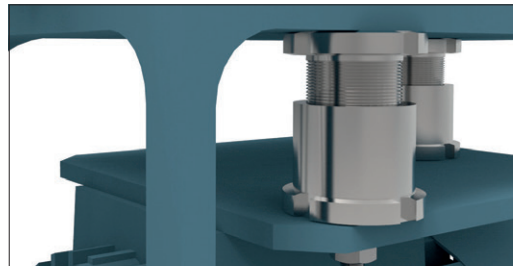

Drive train application - in this application Wixroyd Precision Levellers are used to adjust the rig to ensure correct tension of the V-belt, and to provide full support of the top mounted electric drive motor.

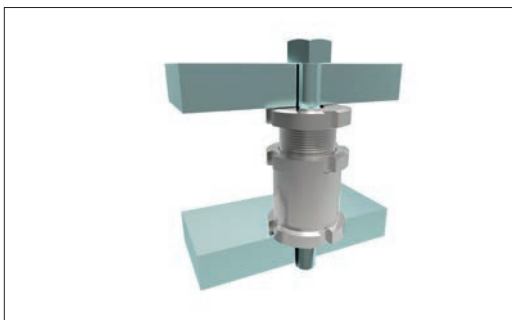

Plummer blocks - even multiple bearings can be levelled easily and precisely, here part no. 62000 is in use.

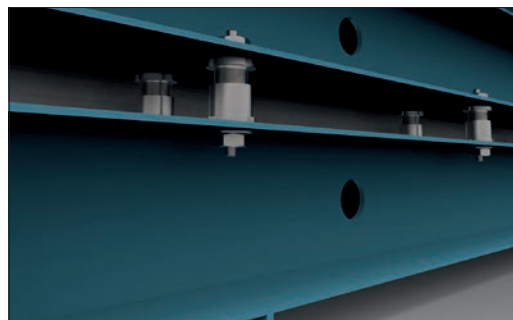


Extruder - precision adjustment of an extruder with leveller no. 62008.



Design features

Wixroyd Precision Levelling Adjusters enable accurate levelling, locating and adjusting of motors, machinery and much more, under heavy loads.

There are three key features to the design, firstly the fine threaded mounting bolt, secondly the threaded nut base and thirdly the end-stop. The fine thread of the mounting bolt and base provides precise adjustment, as well as easy re-adjustment by means of a hook spanner to DIN 1810A, see part no. 95400.

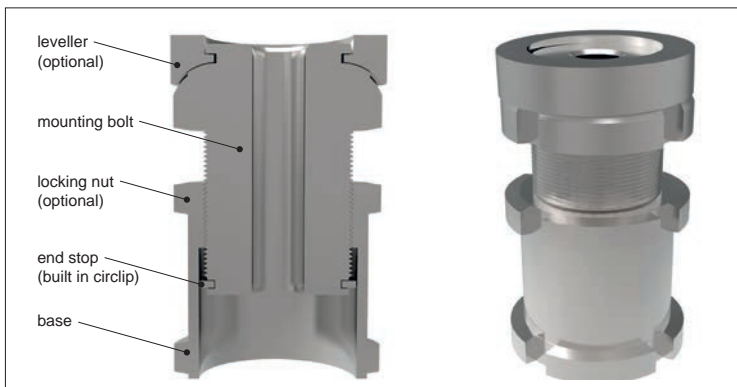

Product range



62000 - Designed for applications with limited space - height adjustment is between 4 and 14mm.



62040 - Designed for applications requiring both height adjustment (from 4 to 14mm) and precise adjustment of non-parallel surfaces, with a maximum angle of tilt 4°.



62060 - Designed for applications where a wide adjustment range is required - height adjustment equal to 15 to 55mm.



62080 - Designed for applications with a dynamic load, or where no fasteners are used. The locknut enables locking of the adjuster in the pre-set position.



62100 - For applications requiring both height adjustment (from 15 to 55mm) and precise adjustment of non-parallel surfaces, with a max. angle of tilt 4°.





62120 - The same features as part number 62100, but with the added feature of a locknut to fix adjuster in any position.



62140/62160 - Designed for applications requiring precise adjustment of non-parallel surfaces, with a maximum angle tilt 4°. The ball shim has no height adjustment feature.

Adjusters vs. levellers

	Precision adjusters				Precision levellers			
Features	62000	62002	62040	62042	62060	62080	62100	62120
Adjustment travel 4-14mm	✓	✓	✓	✓				
Adjustment travel 15-55mm					✓	✓	✓	✓
Lock nut		✓		✓		✓		✓
Slope adjustment up to 4°			✓	✓			✓	✓
Captive screw feature	✓	✓	✓	✓	✓	✓	✓	✓

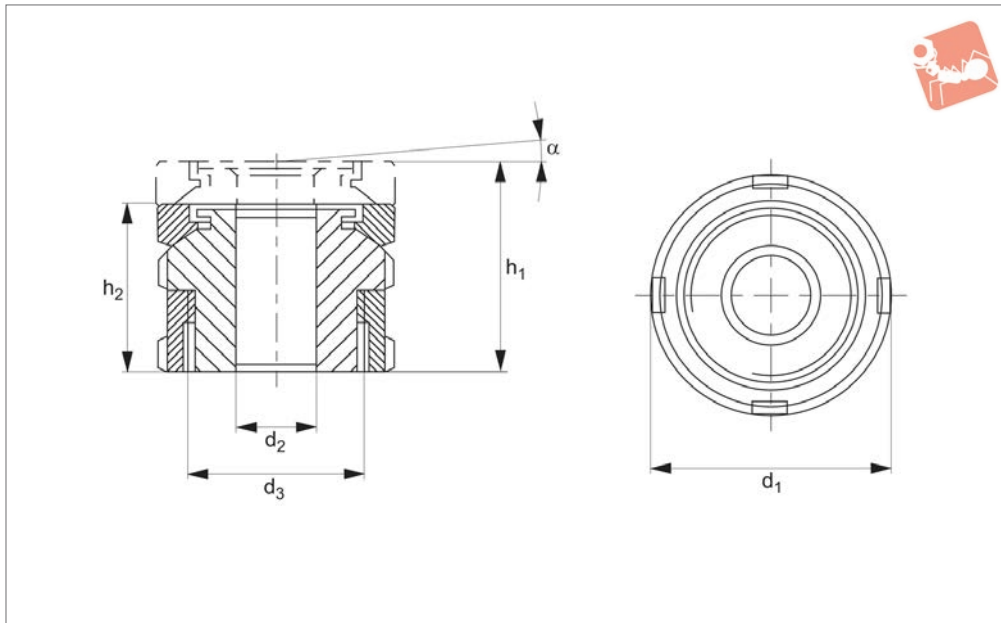

62040

PRECISION LEVELLING ADJUSTERS

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

After setting the height, the structure can be bolted down using a suitable 8,8 strength bolt.

The net load that the unit can carry is the maximum load less the tightening torque recommended for the bolt. Please see useful info tab.

Designed for applications with limited space. Height adjustment is between 4 and 10mm. Designed for applications requiring


both height adjustment and precise adjustment of non-parallel surfaces, with a maximum angle of tilt 4°. For adjustment of non-parallel surfaces without height adjustment, see part no. 62140.



Order No.	Material	For bolt	h_1	h_2	d_1	d_2	d_3	α	Load with bolt kN max.	Load w/o bolt kN max.
62040.W0038	Steel	M 4	26	22	25	4.5	M15x1,0	4°	36.00	40.0
62040.W0039	Steel	M 5	26	22	25	5.5	M15x1,0	4°	33.40	40.0
62040.W0040	Steel	M 6	26	22	25	6.6	M15x1,0	4°	30.70	40.0
62040.W0050	Steel	M 6	31	26	32	6.6	M20x1,0	4°	55.70	65.0
62040.W0051	Steel	M 8	31	26	32	9.0	M20x1,0	4°	48.00	65.0
62040.W0052	Steel	M10	31	26	32	11.0	M20x1,0	4°	37.90	65.0
62040.W0070	Steel	M10	41	34	45	11.0	M30x1,5	4°	92.90	120.0
62040.W0071	Steel	M12	41	34	45	13.5	M30x1,5	4°	80.40	120.0
62040.W0072	Steel	M16	41	34	45	17.5	M30x1,5	4°	45.50	120.0
62040.W0090	Steel	M16	53	44	58	17.5	M40x1,5	4°	136.00	210.0
62040.W0091	Steel	M20	53	44	58	22.0	M40x1,5	4°	90.00	210.0
62040.W0092	Steel	M24	53	44	58	26.0	M40x1,5	4°	37.00	210.0
62040.W0100	Steel	M20	60	50	70	22.0	M50x1,5	4°	210.00	330.0
62040.W0101	Steel	M24	60	50	70	26.0	M50x1,5	4°	157.00	330.0
62040.W0102	Steel	M30	60	50	70	33.0	M50x1,5	4°	53.00	330.0
62040.W0538	Stainless steel	M 4	26	22	25	4.5	M15x1,0	4°	24.14	27.1
62040.W0539	Stainless steel	M 5	26	22	25	5.5	M15x1,0	4°	24.24	27.1
62040.W0540	Stainless steel	M 6	26	22	25	6.6	M15x1,0	4°	20.26	27.1
62040.W0550	Stainless steel	M 6	31	26	32	6.6	M20x1,0	4°	36.56	43.4
62040.W0551	Stainless steel	M 8	31	26	32	9.0	M20x1,0	4°	30.86	43.4
62040.W0552	Stainless steel	M10	31	26	32	11.0	M20x1,0	4°	23.41	43.4
62040.W0570	Stainless steel	M10	41	34	45	11.0	M30x1,5	4°	64.01	84.0
62040.W0571	Stainless steel	M12	41	34	45	13.5	M30x1,5	4°	54.82	84.0
62040.W0572	Stainless steel	M16	41	34	45	17.5	M30x1,5	4°	28.90	84.0
62040.W0590	Stainless steel	M16	53	44	58	17.5	M40x1,5	4°	92.90	148.0
62040.W0591	Stainless steel	M20	53	44	58	22.0	M40x1,5	4°	59.08	148.0
62040.W0592	Stainless steel	M24	53	44	58	26.0	M40x1,5	4°	20.30	148.0
62040.W0600	Stainless steel	M20	60	50	70	22.0	M50x1,5	4°	136.08	225.0
62040.W0601	Stainless steel	M24	60	50	70	26.0	M50x1,5	4°	97.30	225.0



Order No.	Material	For bolt	h_1	h_2	d_1	d_2	d_3	α	Load with bolt kN max.	Load w/o bolt kN max.
62040.W0602	Stainless steel	M30	60	50	70	33.0	M50x1,5	4°	20.60	225.0

PRECISION LEVELLING ADJUSTERS

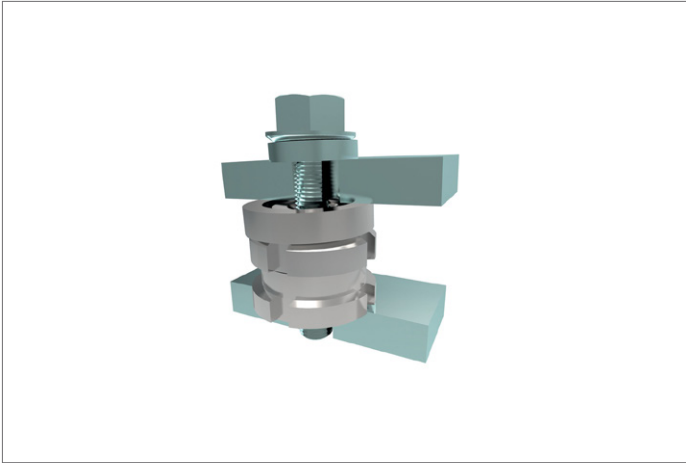

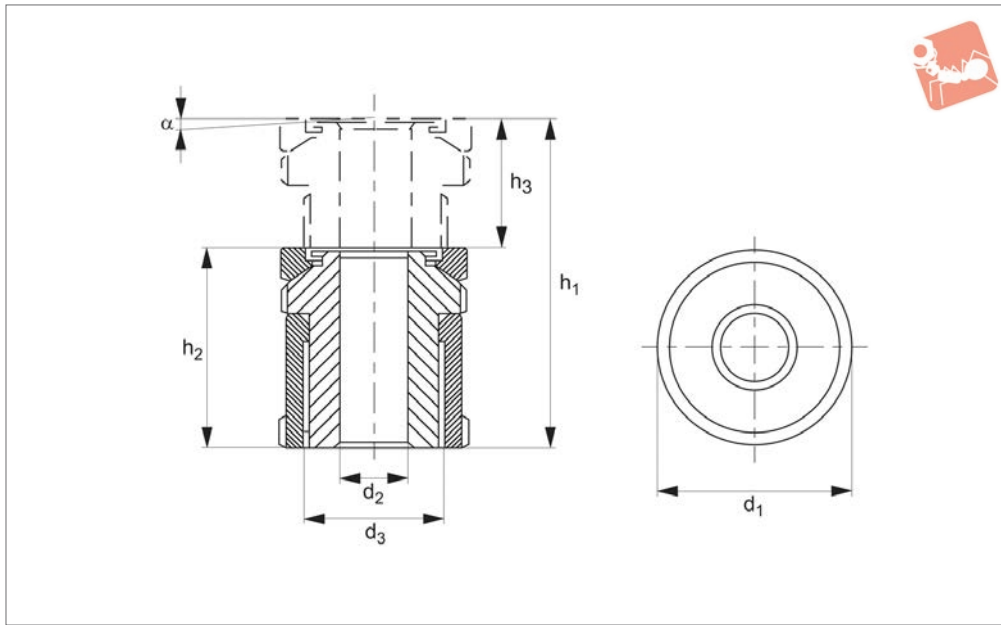

62100

PRECISION LEVELLING ADJUSTERS

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

After setting the height, the structure can be bolted down using a suitable 8,8

strength bolt.


The net load that the unit can carry is the maximum load less the tightening torque recommended for the bolt. Designed for applications where a wide adjustment range is required - height adjustment is

equal to 15 to 40mm.

Order No.	Material	For bolt	h_1 min.	h_2 max.	d_1	d_2	d_3	α app.	Load with bolt kN max.	Load w/o bolt kN max.
62100.W0008	Steel	M 4	50	35	25	4.5	M15x1,0	4°	36.00	40.00
62100.W0009	Steel	M 5	50	35	25	5.5	M15x1,0	4°	33.40	40.00
62100.W0010	Steel	M 6	50	35	25	6.6	M15x1,0	4°	30.70	40.00
62100.W0014	Steel	M 6	63	43	32	6.6	M20x1,0	4°	56.70	65.00
62100.W0015	Steel	M 8	63	43	32	9.0	M20x1,0	4°	48.90	65.00
62100.W0016	Steel	M10	63	43	32	11.0	M20x1,0	4°	37.90	65.00
62100.W0017	Steel	M10	79	54	45	11.0	M30x1,5	4°	92.90	120.00
62100.W0018	Steel	M12	79	54	45	13.5	M30x1,5	4°	80.40	120.00
62100.W0019	Steel	M16	79	54	45	17.5	M30x1,5	4°	45.50	120.00
62100.W0020	Steel	M16	102	70	58	17.5	M40x1,5	4°	136.00	210.00
62100.W0021	Steel	M20	102	70	58	22.0	M40x1,5	4°	90.80	210.00
62100.W0023	Steel	M24	102	70	58	26.0	M40x1,5	4°	37.00	210.00
62100.W0030	Steel	M20	123	83	70	22.0	M50x1,5	4°	210.00	330.00
62100.W0031	Steel	M24	123	83	70	26.0	M50x1,5	4°	157.00	330.00
62100.W0032	Steel	M30	123	83	70	33.0	M50x1,5	4°	53.00	330.00
62100.W0508	Stainless Steel	M 4	50	35	25	4.5	M15x1,0	4°	24.14	27.10
62100.W0509	Stainless Steel	M 5	50	35	25	5.5	M15x1,0	4°	22.24	27.10
62100.W0510	Stainless Steel	M 6	50	35	25	6.6	M15x1,0	4°	20.26	27.10
62100.W0514	Stainless Steel	M 6	63	43	32	6.6	M20x1,0	4°	36.56	43.40
62100.W0515	Stainless Steel	M 8	63	43	32	9.0	M20x1,0	4°	30.86	43.40
62100.W0516	Stainless Steel	M10	63	43	32	11.0	M20x1,0	4°	23.41	43.40
62100.W0517	Stainless Steel	M10	79	54	45	11.0	M30x1,5	4°	64.01	84.00
62100.W0518	Stainless Steel	M12	79	54	45	13.5	M30x1,5	4°	54.52	84.00
62100.W0519	Stainless Steel	M16	79	54	45	17.5	M30x1,5	4°	28.90	84.00
62100.W0520	Stainless Steel	M16	102	70	58	17.5	M40x1,5	4°	92.90	148.00
62100.W0521	Stainless Steel	M20	102	70	58	22.0	M40x1,5	4°	59.08	148.00
62100.W0523	Stainless Steel	M24	102	70	58	26.0	M40x1,5	4°	20.30	148.00
62100.W0530	Stainless Steel	M20	123	83	70	22.0	M50x1,5	4°	136.08	225.00
62100.W0531	Stainless Steel	M24	123	83	70	26.0	M50x1,5	4°	97.30	225.00
62100.W0532	Stainless Steel	M30	123	83	70	33.0	M50x1,5	4°	20.60	225.00



62002

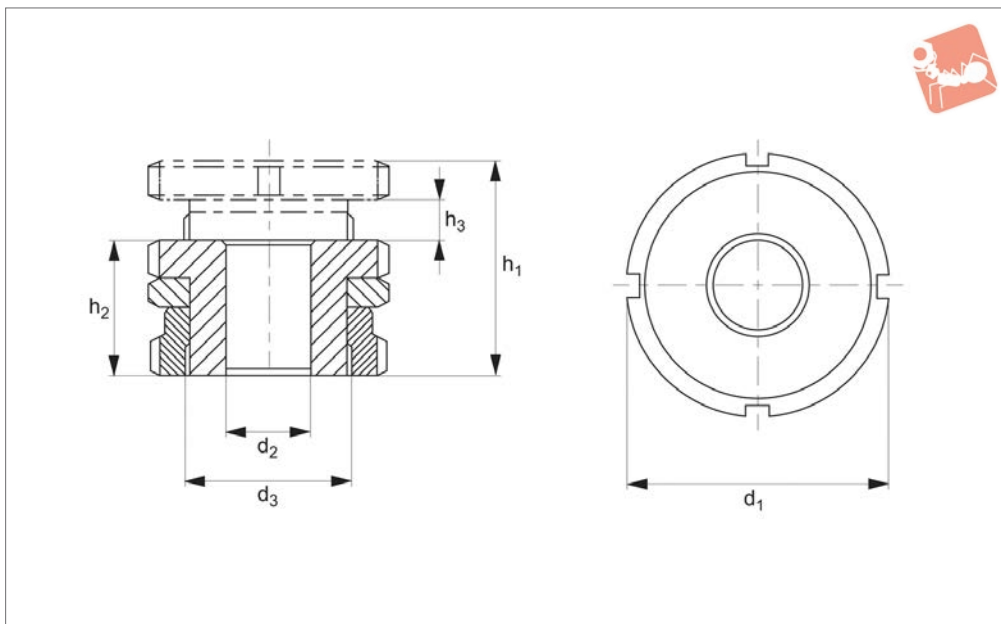

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes


After setting the height, the structure can be bolted down using a suitable 8,8

strength bolt.

The net load that the unit can carry is the maximum load less the tightening torque recommended for the bolt. Designed for applications with limited space. Height adjustment is between 4 and 10mm. The


lock nut included enables the adjuster to be secured in a present position and is recommended for use on applications with a dynamic load or where fasteners are not used.

Order No.	Material	For bolt	h_1	h_2	h_3	d_1	d_2	d_3	Load with bolt kN max.	Load w/o bolt kN max.
62002.W0038	Steel	M 4	24	20	4	25	4.5	M15x1,0	36.00	40.00
62002.W0039	Steel	M 5	24	20	4	25	5.5	M15x1,0	33.40	40.00
62002.W0040	Steel	M 6	24	20	4	25	6.6	M15x1,0	30.70	40.00
62002.W0050	Steel	M 6	29	24	5	32	6.6	M20x1,0	55.70	65.00
62002.W0051	Steel	M 8	29	24	5	32	9.0	M20x1,0	48.00	65.00
62002.W0052	Steel	M10	29	24	5	32	11.0	M20x1,0	37.90	65.00
62002.W0070	Steel	M10	36	29	7	45	11.0	M30x1,5	92.90	120.00
62002.W0071	Steel	M12	36	29	7	45	13.5	M30x1,5	80.40	120.00
62002.W0072	Steel	M16	36	29	7	45	17.5	M30x1,5	45.50	120.00
62002.W0090	Steel	M16	46	37	9	58	17.5	M40x1,5	136.00	210.00
62002.W0091	Steel	M20	46	37	9	58	22.0	M40x1,5	90.00	210.00
62002.W0092	Steel	M24	46	37	9	58	26.0	M40x1,5	37.00	210.00
62002.W0100	Steel	M20	54	44	10	70	22.0	M50x1,5	210.00	330.00
62002.W0101	Steel	M24	54	44	10	70	26.0	M50x1,5	157.00	330.00
62002.W0102	Steel	M30	54	44	10	70	33.0	M50x1,5	53.00	330.00
62002.W0538	Stainless Steel	M 4	24	20	4	25	4.5	M15x1,0	24.14	27.10
62002.W0539	Stainless Steel	M 5	24	20	4	25	5.5	M15x1,0	24.14	27.10
62002.W0540	Stainless Steel	M 6	24	20	4	25	6.6	M15x1,0	20.26	27.10
62002.W0550	Stainless Steel	M 6	29	24	5	32	6.6	M20x1,0	36.56	43.40
62002.W0551	Stainless Steel	M 8	29	24	5	32	9.0	M20x1,0	30.86	43.40
62002.W0552	Stainless Steel	M10	29	24	5	32	11.0	M20x1,0	23.41	43.40
62002.W0570	Stainless Steel	M10	36	29	7	45	11.0	M30x1,5	64.01	84.00
62002.W0571	Stainless Steel	M12	36	29	7	45	13.5	M30x1,5	54.82	84.00
62002.W0572	Stainless Steel	M16	36	29	7	45	17.5	M30x1,5	28.90	84.00
62002.W0590	Stainless Steel	M16	46	37	9	58	17.5	M40x1,5	92.90	148.00
62002.W0591	Stainless Steel	M20	46	37	9	58	22.0	M40x1,5	59.08	148.00
62002.W0592	Stainless Steel	M24	46	37	9	58	26.0	M40x1,5	20.30	148.00
62002.W0600	Stainless Steel	M20	54	44	10	70	22.0	M50x1,5	136.08	225.00
62002.W0601	Stainless Steel	M24	54	44	10	70	26.0	M50x1,5	59.08	225.00
62002.W0602	Stainless Steel	M30	54	44	10	70	33.0	M50x1,5	20.60	225.00

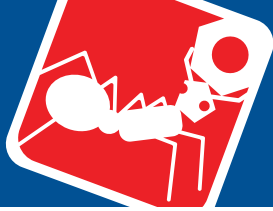

Precision Adjuster with locking nut

Precision Level- ling Adjusters

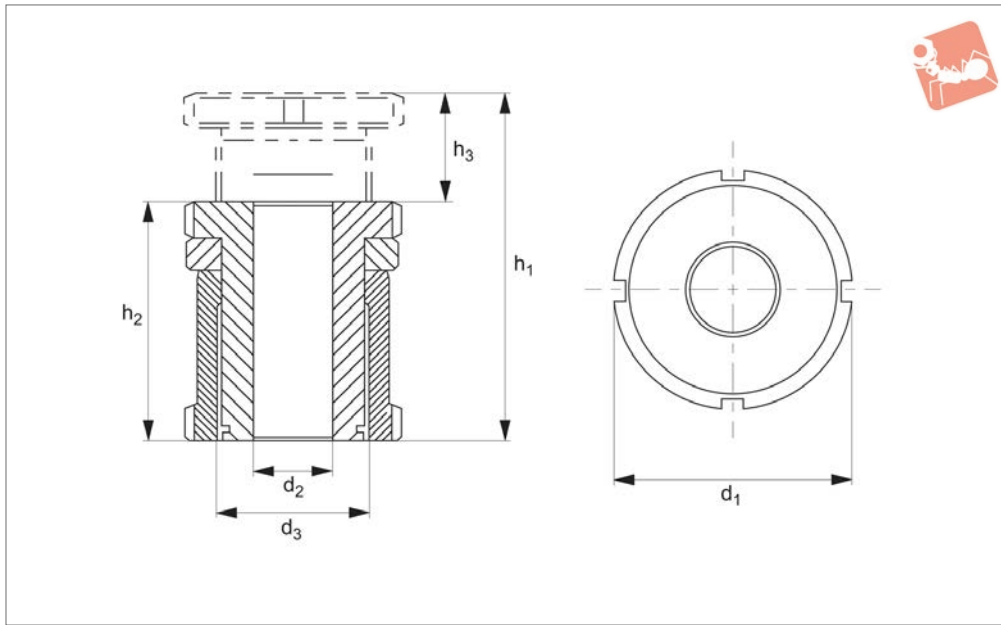

62080

PRECISION LEVELLING ADJUSTERS

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

After setting the height, the structure can be bolted down using a suitable 8,8

strength bolt.

The net load that the unit can carry is the maximum load less the tightening torque recommended for the bolt.

Designed for applications with a dynamic load, or where no fasteners are used. The

locknut enables locking of the adjuster in a pre-set position.

Order No.	Material	For bolt	h_1	h_2	h_3	d_1	d_2	d_3	Load with bolt kN max.	Load w/o bolt kN max.
62080.W0008	Steel	M 4	43	33	10	25	4.5	M15x1,0	36.00	40.00
62080.W0009	Steel	M 5	43	33	10	25	5.5	M15x1,0	33.40	40.00
62080.W0010	Steel	M 6	43	33	10	25	6.6	M15x1,0	30.70	40.00
62080.W0014	Steel	M 6	55	41	14	32	6.6	M20x1,0	55.70	65.00
62080.W0015	Steel	M 8	55	41	14	32	9.0	M20x1,0	48.00	65.00
62080.W0016	Steel	M10	55	41	14	32	11.0	M20x1,0	37.90	65.00
62080.W0017	Steel	M10	67	49	18	45	11.0	M30x1,5	92.90	120.00
62080.W0018	Steel	M12	67	49	18	45	13.5	M30x1,5	80.40	120.00
62080.W0019	Steel	M16	67	49	18	45	17.5	M30x1,5	45.50	120.00
62080.W0020	Steel	M16	86	63	23	58	17.5	M40x1,5	136.00	210.00
62080.W0021	Steel	M20	86	63	23	58	22.0	M40x1,5	90.00	210.00
62080.W0023	Steel	M24	86	63	23	58	26.0	M40x1,5	37.00	210.00
62080.W0030	Steel	M20	106	77	29	70	22.0	M50x1,5	210.00	330.00
62080.W0031	Steel	M24	106	77	29	70	26.0	M50x1,5	157.00	330.00
62080.W0032	Steel	M30	106	77	29	70	33.0	M50x1,5	53.00	330.00
62080.W0508	Stainless steel	M 4	43	33	10	25	4.5	M15x1,0	24.14	27.10
62080.W0509	Stainless steel	M 5	43	33	10	25	5.5	M15x1,0	22.24	27.10
62080.W0510	Stainless steel	M 6	43	33	10	25	6.6	M15x1,0	20.26	27.10
62080.W0514	Stainless steel	M 6	55	41	14	32	6.6	M20x1,0	36.56	43.40
62080.W0515	Stainless steel	M 8	55	41	14	32	9.0	M20x1,0	30.86	43.40
62080.W0516	Stainless steel	M10	55	41	14	32	11.0	M20x1,0	23.41	43.40
62080.W0517	Stainless steel	M10	67	49	18	45	11.0	M30x1,5	64.01	84.00
62080.W0518	Stainless steel	M12	67	49	18	45	13.5	M30x1,5	54.82	84.00
62080.W0519	Stainless steel	M16	67	49	18	45	17.5	M30x1,5	28.90	84.00
62080.W0520	Stainless steel	M16	86	63	23	58	17.5	M40x1,5	92.90	148.00
62080.W0521	Stainless steel	M20	86	63	23	58	22.0	M40x1,5	59.08	148.00
62080.W0523	Stainless steel	M24	86	63	23	58	26.0	M40x1,5	20.30	148.00
62080.W0530	Stainless steel	M20	106	77	29	70	22.0	M50x1,5	136.08	225.00
62080.W0531	Stainless steel	M24	106	77	29	70	26.0	M50x1,5	97.30	225.00
62080.W0532	Stainless steel	M30	106	77	29	70	33.0	M50x1,5	20.60	225.00






Tilt Head Precision Adjuster

short with locking nut

Precision Leveling Adjusters

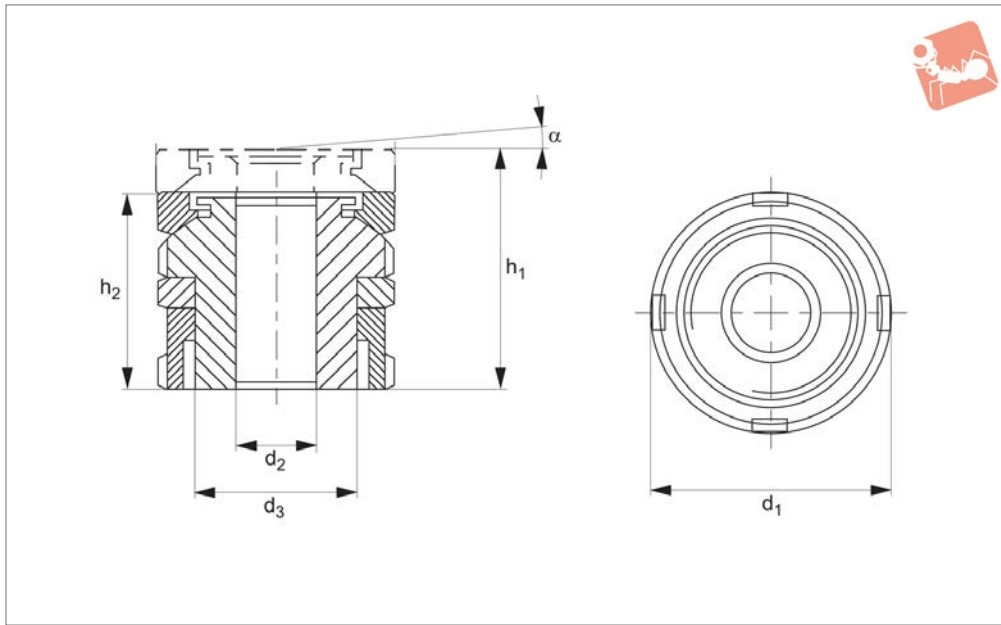

62042

PRECISION LEVELLING ADJUSTERS

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

The application of the ball head precision adjuster with lock nut facilitates precise


adjustment of non-parallel surfaces with a maximum adjustment angle of symbol α / symbol 4° . The lock nut included enables the adjuster to be secured in a present position. The static net load is calculable after subtracting the pre-load (bolt

strength class 8.8) from the total load. The lock nut included enables the adjuster to be secured in a preset position.

Order No.	Material	For bolt	h_1 min.	h_2 max.	d_1	d_2	d_3	α app.	Load with bolt kN max.	Load w/o bolt kN max.
62042.W0038	Steel	M 4	31	27	25	4.5	M15x1,0	4°	36.00	40.00
62042.W0039	Steel	M 5	31	27	25	5.5	M15x1,0	4°	33.40	40.00
62042.W0040	Steel	M 6	31	27	25	6.6	M15x1,0	4°	30.70	40.00
62042.W0050	Steel	M 6	37	32	32	6.6	M20x1,0	4°	55.70	65.00
62042.W0051	Steel	M 8	37	32	32	9.0	M20x1,0	4°	48.00	65.00
62042.W0052	Steel	M10	37	32	32	11.0	M20x1,0	4°	37.90	65.00
62042.W0070	Steel	M10	48	41	45	11.0	M30x1,5	4°	92.90	120.00
62042.W0071	Steel	M12	48	41	45	13.5	M30x1,5	4°	80.40	120.00
62042.W0072	Steel	M16	48	41	45	17.5	M30x1,5	4°	45.50	120.00
62042.W0090	Steel	M16	62	53	58	17.5	M40x1,5	4°	136.00	210.00
62042.W0091	Steel	M20	62	53	58	22.0	M40x1,5	4°	90.00	210.00
62042.W0092	Steel	M24	62	53	58	26.0	M40x1,5	4°	37.00	210.00
62042.W0100	Steel	M20	71	61	70	26.0	M50x1,5	4°	136.00	330.00
62042.W0101	Steel	M24	71	61	70	33.0	M50x1,5	4°	157.00	330.00
62042.W0102	Steel	M30	71	61	70	39.0	M50x1,5	4°	53.00	330.00
62042.W0538	Stainless Steel	M 4	31	27	25	4.5	M15x1,0	4°	36.00	27.10
62042.W0539	Stainless Steel	M 5	31	27	25	5.5	M15x1,0	4°	33.40	27.10
62042.W0540	Stainless Steel	M 6	31	27	25	6.6	M15x1,0	4°	30.70	27.10
62042.W0550	Stainless Steel	M 6	37	32	32	6.6	M20x1,0	4°	36.56	43.40
62042.W0551	Stainless Steel	M 8	37	32	32	9.0	M20x1,0	4°	30.86	43.40
62042.W0552	Stainless Steel	M10	37	32	32	11.0	M20x1,0	4°	23.41	43.40
62042.W0570	Stainless Steel	M10	48	41	45	11.0	M30x1,5	4°	64.01	84.00
62042.W0571	Stainless Steel	M12	48	41	45	13.5	M30x1,5	4°	54.82	84.00
62042.W0572	Stainless Steel	M16	48	41	45	17.5	M30x1,5	4°	28.90	84.00
62042.W0590	Stainless Steel	M16	62	53	58	17.5	M40x1,5	4°	92.90	148.00
62042.W0591	Stainless Steel	M20	62	53	58	22.0	M40x1,5	4°	59.08	148.00
62042.W0592	Stainless Steel	M24	62	53	58	26.0	M40x1,5	4°	20.30	148.00
62042.W0600	Stainless Steel	M20	71	61	70	26.0	M50x1,5	4°	136.08	225.00
62042.W0601	Stainless Steel	M24	71	61	70	33.0	M50x1,5	4°	97.30	225.00
62042.W0602	Stainless Steel	M30	71	61	70	39.0	M50x1,5	4°	20.60	225.00



62120

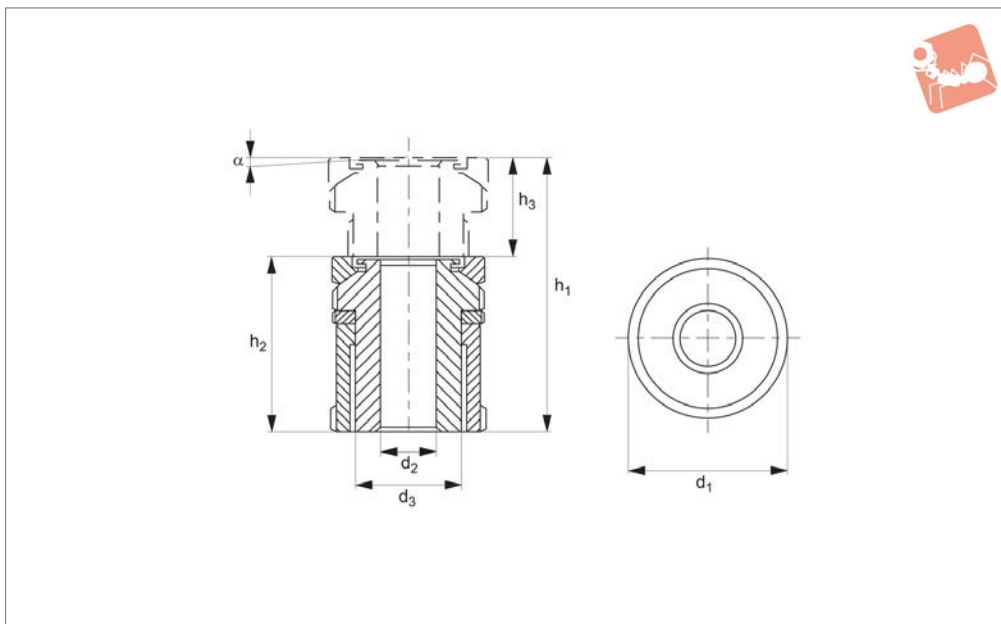

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

After setting the height, the structure can be bolted down using a suitable 8,8



strength bolt.

The net load that the unit can carry is the maximum load less the tightening torque recommended for the bolt.

Designed for applications where a wide adjustment range is required - height

adjustment is equal to 15 to 40mm.

Order No.	Material	For bolt	h_1	h_2	h_3	d_1	d_2	d_3	α app.	Load with bolt kN max.	Load w/o bolt kN max.
62120.W0008	Steel	M 4	50	40	10	25	4.5	M15x1,0	4°	36.00	40.00
62120.W0009	Steel	M 5	50	40	10	25	5.5	M15x1,0	4°	33.40	40.00
62120.W0010	Steel	M 6	50	40	10	25	6.5	M15x1,0	4°	30.70	40.00
62120.W0014	Steel	M 6	63	49	14	32	6.6	M20x1,0	4°	55.70	65.00
62120.W0015	Steel	M 8	63	49	14	32	9.0	M20x1,0	4°	48.00	65.00
62120.W0016	Steel	M10	63	49	14	32	11.0	M20x1,0	4°	37.90	65.00
62120.W0017	Steel	M10	79	61	18	45	11.0	M30x1,5	4°	92.90	120.00
62120.W0018	Steel	M12	79	61	18	45	13.5	M30x1,5	4°	80.40	120.00
62120.W0019	Steel	M16	79	61	18	45	17.5	M30x1,5	4°	45.50	120.00
62120.W0020	Steel	M16	102	79	23	58	17.5	M40x1,5	4°	136.00	210.00
62120.W0021	Steel	M20	102	79	23	58	22.0	M40x1,5	4°	90.00	210.00
62120.W0023	Steel	M24	102	79	23	58	26.0	M40x1,5	4°	37.00	210.00
62120.W0030	Steel	M20	123	94	29	70	22.0	M50x1,5	4°	210.00	330.00
62120.W0031	Steel	M24	123	94	29	70	26.0	M50x1,5	4°	157.00	330.00
62120.W0032	Steel	M30	123	94	29	70	33.0	M50x1,5	4°	53.00	330.00
62120.W0508	Stainless steel	M 4	50	40	10	25	4.5	M15x1,0	4°	24.14	27.10
62120.W0509	Stainless steel	M 5	50	40	10	25	5.5	M15x1,0	4°	22.24	27.10
62120.W0510	Stainless steel	M 6	50	40	10	25	6.5	M15x1,0	4°	20.26	27.10
62120.W0514	Stainless steel	M 6	63	49	14	32	6.6	M20x1,0	4°	36.56	43.40
62120.W0515	Stainless steel	M 8	63	49	14	32	9.0	M20x1,0	4°	30.86	43.40
62120.W0516	Stainless steel	M10	63	49	14	32	11.0	M20x1,0	4°	23.41	43.40
62120.W0517	Stainless steel	M10	79	61	18	45	11.0	M30x1,5	4°	64.01	84.00
62120.W0518	Stainless steel	M12	79	61	18	45	13.5	M30x1,5	4°	54.82	84.00
62120.W0519	Stainless steel	M16	79	61	18	45	17.5	M30x1,5	4°	28.90	84.00
62120.W0520	Stainless steel	M16	102	79	23	58	17.5	M40x1,5	4°	92.90	148.00
62120.W0521	Stainless steel	M20	102	79	23	58	22.0	M40x1,5	4°	59.08	148.00
62120.W0523	Stainless steel	M24	102	79	23	58	26.0	M40x1,5	4°	20.30	148.00
62120.W0530	Stainless steel	M20	123	94	29	70	22.0	M50x1,5	4°	136.08	225.00
62120.W0531	Stainless steel	M24	123	94	29	70	26.0	M50x1,5	4°	97.30	225.00
62120.W0532	Stainless steel	M30	123	94	29	70	33.0	M50x1,5	4°	20.60	225.00

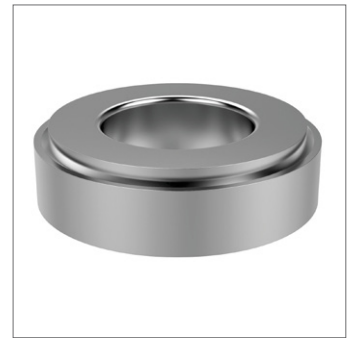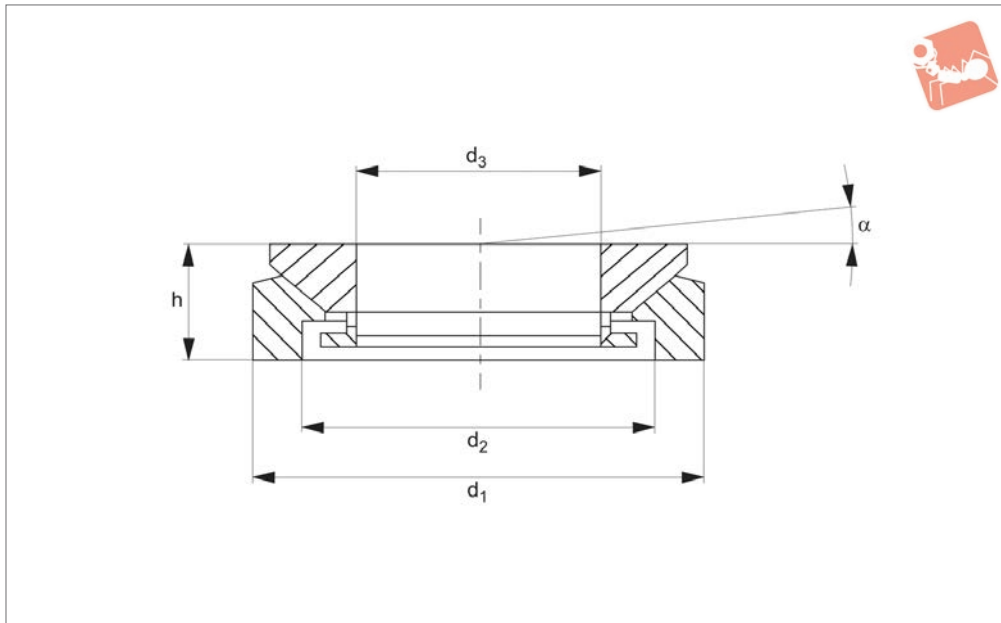

62140

PRECISION LEVELLING ADJUSTERS

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).


Technical Notes

Compensates for non-level surfaces with a maximum angle of tilt 4°. Please remember


that the fixing screw and washer may also require support if the bearing surface is out of parallel by more than 1°.

The ball shim has no height adjustment feature.

Order No.	Material	For bolt	d ₁	d ₂	d ₃	h	α app.
62140.W0015	Steel	M 6	25	15	8.5	8.0	4°
62140.W0020	Steel	M10	32	20	13.0	10.0	4°
62140.W0030	Steel	M16	45	30	20.0	12.5	4°
62140.W0040	Steel	M24	58	38	29.0	16.0	4°
62140.W0050	Steel	M30	70	48	36.0	20.0	4°
62140.W0060	Steel	M36	80	61	44.0	20.0	4°
62140.W0080	Steel	M48	105	78	58.0	25.0	4°
62140.W0515	Stainless steel	M 6	25	15	8.5	8.0	4°
62140.W0520	Stainless steel	M10	32	20	13.0	10.0	4°
62140.W0530	Stainless steel	M16	45	30	20.0	12.5	4°
62140.W0540	Stainless steel	M24	58	38	29.0	16.0	4°
62140.W0550	Stainless steel	M30	70	48	36.0	20.0	4°
62140.W0560	Stainless steel	M36	80	61	44.0	20.0	4°
62140.W0580	Stainless steel	M48	105	78	58.0	25.0	4°



62160

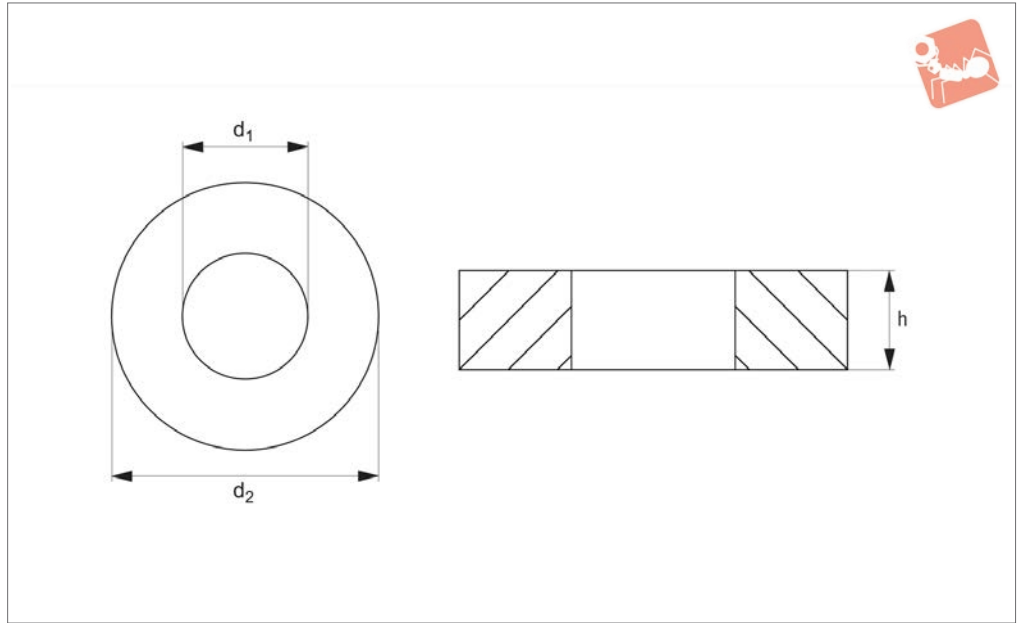

Material

Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

Used to bridge gaps on applications where the height adjustment of an adjuster is

insufficient.

Order No.	Material	For bolt	d_1	d_2	h
62160.W0015	Steel	M 6	6.6	25	4
62160.W0020	Steel	M10	11.0	32	5
62160.W0030	Steel	M16	17.5	45	6
62160.W0040	Steel	M24	26.0	58	8
62160.W0050	Steel	M30	33.0	70	10
62160.W0060	Steel	M36	39.0	80	12
62160.W0080	Steel	M48	52.0	105	16
62160.W0515	Stainless steel	M 6	6.6	25	4
62160.W0520	Stainless steel	M10	11.0	32	5
62160.W0530	Stainless steel	M16	17.5	45	6
62160.W0540	Stainless steel	M24	26.0	58	8
62160.W0550	Stainless steel	M30	33.0	70	10
62160.W0560	Stainless steel	M36	39.0	80	12
62160.W0580	Stainless steel	M48	52.0	105	16